

A SUPERB, LOW PITCH, ANTI-VANDAL PANTILE SHEET



- ✓ Educational buildings
- ✓ Commercial buildings
- ✓ Flat to pitch
- ✓ Community centres
- ✓ Holiday homes
- ✓ Park homes
- ✓ Stables
- ✓ Conservatories
- ✓ Lean to's
- ✓ Garages



A SUPERB, LOW PITCH, ANTI-VANDAL PANTILE SHEET

ADVANTAGES

- British made
- Designed to give a traditional tile appearance
- Lightweight
- Extremely low pitch
- Good vandal resistance (0.9mm steel base)
- Quick installation
- Cost effective
- Virtually maintenance free
- Extensive range of accessories and flashings available
- Fully dry-fixed
- 50-year warranty
- Full technical support available


TECHNICAL DATA

- Min. pitch: 5°
- Max. pitch: 90°
- Overall width: 1080mm
- Cover width: 1040mm
- Side lap: 40mm
- Step: 12mm
- Purlin Centres (max): 1500mm
- Individual tile module: 300mm
- Maximum sheet length: 6m (over 6m for special orders)
- Steel base: 0.9mm
- Weight as laid per m²: 11kg
- Fire resistance: BS EN13501-5:2016 Broof (t4)

COLOURS AVAILABLE



Acrylic Top Coat →
 Acrylic Base Coat →
 Epoxy Primer →
 0.9mm Galvanised Steel / Alu Zinc Base →
 Epoxy Primer →
 Polyester Coating →

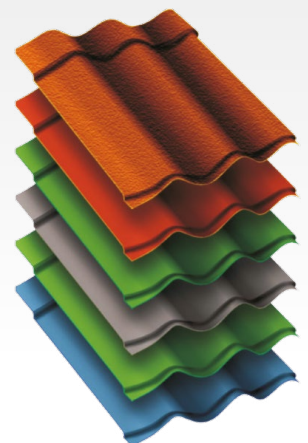

Kingfisher House, Unit 17, Overthorpe Road, Banbury OX16 4SX
 T +44 (0) 1295 250998 F +44 (0) 1295 271068 E sales@britmet.co.uk

www.britmet.co.uk

APPROVALS:

- British Board of Agrément 89/2272
- Manufactured using ISO 9001 approved materials